

Main Feature

1. Single contact Form (SPST) series Relay offers switching capacity 30A in small size.
2. Dust cover, sealed & unclosed cover types are available.
3. Class F insulation system.
4. Halogen Free series available.

Contact Rating

Load Type	GU (DM)	GU (DB)	GU (D)
Rated Load (Resistive)	30A 120VAC	10A 240VAC	NC: 20A 240VAC
	30A 240VAC	10A 30VDC	20A 30VDC
	30A 30VDC	-	NO: 30A 240VAC
	-	-	30A 30VDC
Contact Capacity	TV-8 120VAC	-	TV-8 120VAC
	1-1/2HP 240VAC	1-1/2HP 240VAC	1-1/2HP 240VAC
	1/2HP 240VAC	1/2HP 240VAC	1/2HP 240VAC
Rated Carrying Current	30A	10A	30A
Max. Allowable Voltage	AC 240V	AC 240V	AC 240V
Max. Allowable Current	30A	10A	20A
Max. Allowable Power Force	7,200VA	2,400VA	4,800VA
	900W	300W	600W
Contact Material	Ag Alloy	Ag Alloy	Ag Alloy
Contact Form	SPST	SPST	SPDT

Application

Domestic Appliances, Heating, Ventilating and Conditioning System, Car Control Switching Box, General Power Switching Applications.

Performance (at Initial Value)

- Contact Resistance 100mΩMax. @1A,6VDC
- Operate Time..... 15 mSec. Max.
- Release Time 10 mSec. Max.
- Dielectric Strength:
 - Between Coil & Contact..... 1,500VAC at 50/60 Hz for one minute.
 - Between Contacts 1,500VAC at 50/60 Hz for one minute.
- Insulation Resistance 100 MegaΩ Min. at 500VDC.
- Max. On/Off Switching:
 - Electrical..... 6 Cycles per Minute.
 - Mechanical 300 Cycles per Minute.

- Temperature Range -25~55°C
- Humidity Range 45~85% RH.
- Coil Temperature Rise..... 60°C Max.
- Vibration:
 - Endurance 10 to 55 Hz dual amplitude width 1.5 mm.
 - Error Operation..... 10 to 55 Hz dual amplitude width 1.5 mm.
- Shock:
 - Endurance 1,000 m/S².
 - Error Operation..... 50 m/S².
- Life Expectancy:
 - Mechanical 10⁷ Operations at No Load condition.
 - Electrical 10⁵ Operations at Rated Resistive Load.
- Weight Flow Solder Type: 27.2g
Open Type: 21.6g.

Safety Standard & File Number

- UL & C-UL E141060

Coil Specification (at 20°C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance (Ω±10%)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
GU-D	5	185	27	Abt. 0.93	80% Maximum	5% Minimum	150% (for short time carrying current)
	6	150	40				
	9	93	97				
	12	77	155				
	15	59	255				
	18	47	380				
	24	36	660				
	36	25.8	1,390				
	48	19.4	2,480				
	110	8.5	13,000				

Ordering Information

GU

-

SS

-

1

12

D

M

CF

Insulation System:

Contact Form:

Coil Type:

Coil Voltage:

Number of Pole:

Type of Sealing:

Type:

Nil: Standard Class

CF: F Class

Nil: One Form C

M: One Form A

B: One Form B

D: Standard DC Coil

05: 5V, 06: 6V, 09: 9V, 12: 12V, 15: 15V, 18: 18V, 24: 24V, 36: 36V, 48: 48V, 110: 110V

1: One Pole

Nil: RT 0 Unclosed Relays

SS: RT II Flux Proofed Relays

SH: RT III Wash Tight Relays

GU




Classification

Model	GU		
Insulation System	Nil: Standard Class / CF: F Class		
Contact Form	1C	1A	1B
Unclosed Relay	GU-1□□D(CF)	GU-1□□DM(CF)	GU-1□□DB(CF)
Flux Proofed Type	GU-SS/SH-1□□D(CF)	GU-SS/SH-1□□DM(CF)	GU-SS/SH-1□□DB(CF)


GU

Dimension ($\leq 5\text{mm} + 0.2\text{mm}$, $> 5\text{mm} + 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)

GU

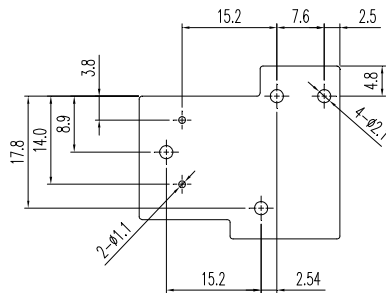
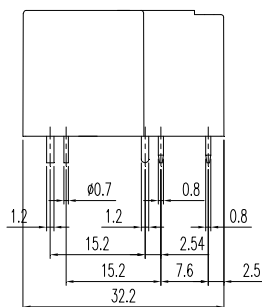
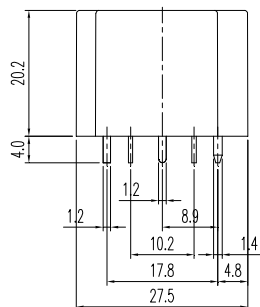


P.C.B. Layout




BOTTOM VIEW

GU(Single Common)

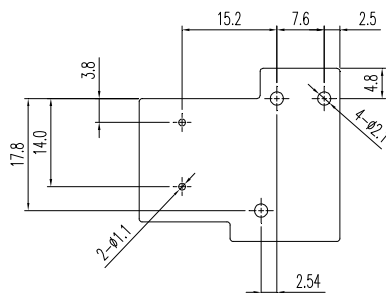
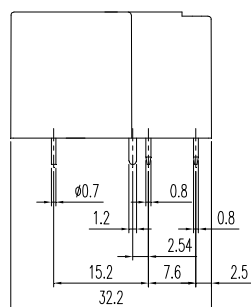
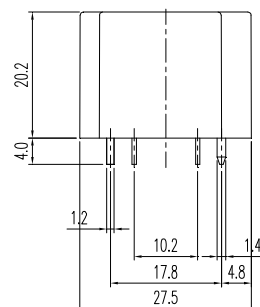


P.C.B. Layout




BOTTOM VIEW

GU Unclosed

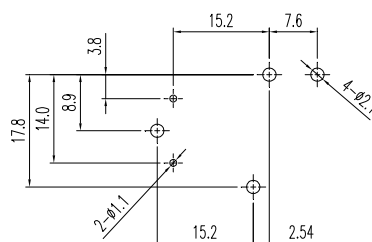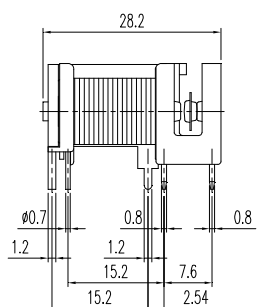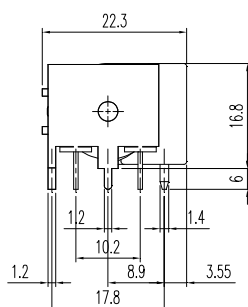

P.C.B. Layout



BOTTOM VIEW