

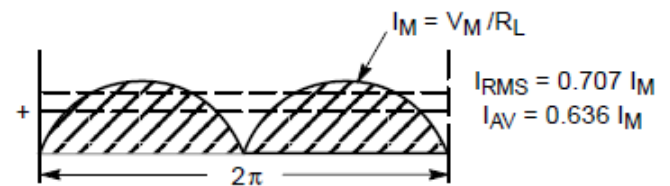


For normal DC-motor use only diode bridge

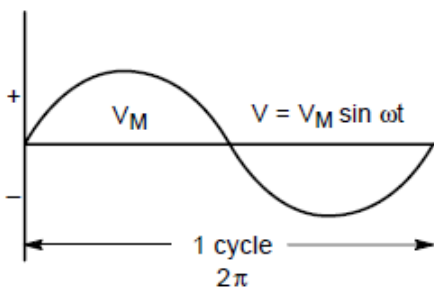

For control use simple triac controller

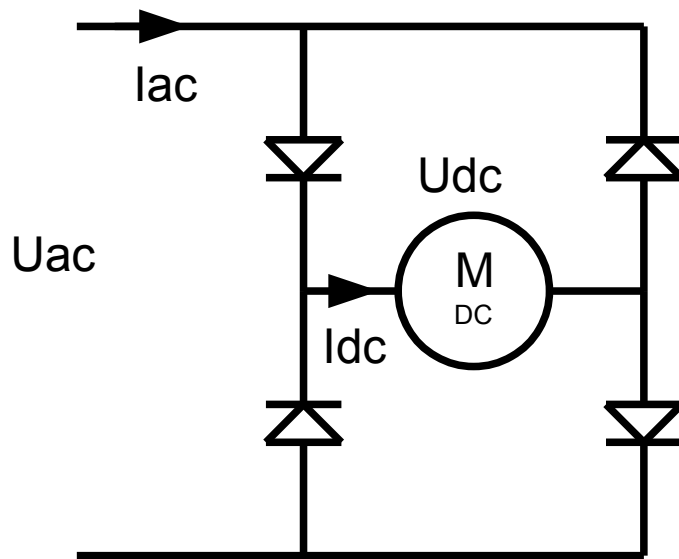