

Product Data sheet : Current Transformer- CT1248-RC

Date : 26.08.2006


Rev : 01

Page 1 of 1



Customer: Standard Type

Customer's part No.: ---

MECHANICAL DIMENSIONS

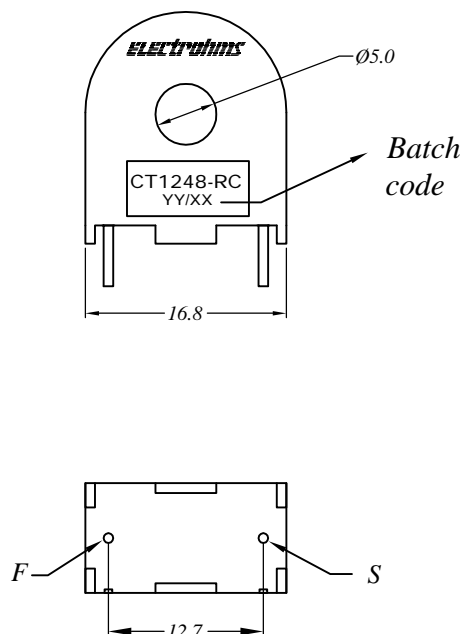

Primary Current

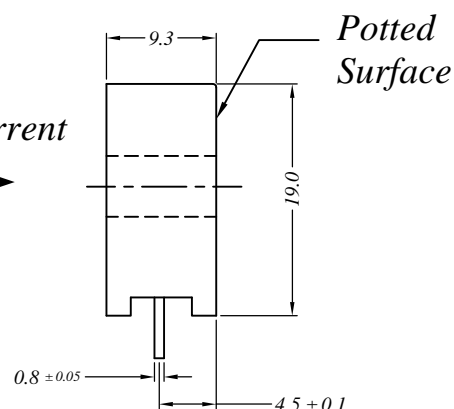

Termination:- F : Finish, S : Start

GENERAL TOL. ± 0.5 mm	
ALL DIMENSIONS ARE IN 'mm'	SCALE -NTS

FEATURES :

- Low Amplitude Error & Phase Error.
- Encapsulated & P.C. Mountable.

SPECIFICATIONS **

PARAMETERS	VALUES
Current Range	0.05 – 10 Arms
Frequency of Operation	50/60 Hz
D C R@ 25°C	48-58 Ω
Turns Ratio	1 : 1500
Recommended Secondary Burden	75.0 Ω (Resistive)
Amplitude Error	<0.2%
Phase Error	<0.5°
Operating Temperature Range	- 40 °C to + 70 °C.

** Specifications subject to change.

Note :

Amplitude error and Phase error values are guaranteed with recommended Secondary burden. Refer to ELECTROHMS Product Design Group for use of burden other than recommended Secondary burden.

Electrohms Pvt. Ltd.,

#881/B, Dr. M.C Modi Hospital Road,
Basaveshwaranagar,
Bangalore - 560 086, India

Tel: +91 (80) 23220025
Fax: +91 (80) 23224756
www.electrohms.com
e-mail: info@electrohms.com