


The RM4136 and RV4136 are obsolete and are no longer supplied.

# RC4136, RM4136, RV4136 QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS


SLOS072A – MARCH 1978 – REVISED JANUARY 2002

- Continuous Short-Circuit Protection
- Wide Common-Mode and Differential Voltage Ranges
- No Frequency Compensation Required
- Low Power Consumption
- No Latch-Up
- Unity-Gain Bandwidth . . . 3 MHz Typ
- Gain and Phase Match Between Amplifiers
- Designed To Be Interchangeable With Raytheon RC4136, RM4136, and RV4136
- Low Noise . . . 8 nV $\sqrt{\text{Hz}}$  Typ at 1 kHz

**RM4136 . . . J OR W PACKAGE**  
**ALL OTHERS . . . D OR N PACKAGE**  
**(TOP VIEW)**

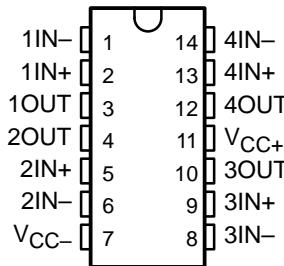

**RM4136 . . . FK PACKAGE**  
**(TOP VIEW)**

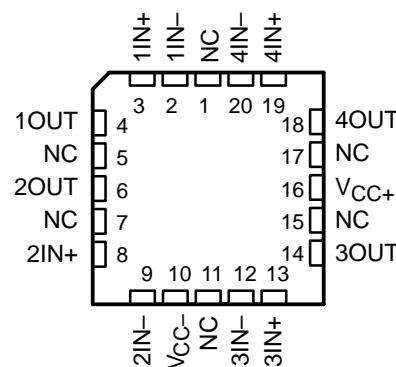

NC – No internal connection


## description

The RC4136, RM4136, and RV4136 are quad general-purpose operational amplifiers, with each amplifier electrically similar to the  $\mu$ A741, except that offset null capability is not provided.

The high common-mode input voltage range and the absence of latch-up make these amplifiers ideal for voltage-follower applications. The devices are short-circuit protected and the internal frequency compensation ensures stability without external components.

The RC4136 is characterized for operation from 0°C to 70°C, the RM4136 is characterized for operation over the full military temperature range of -55°C to 125°C, and the RV4136 is characterized for operation from -40°C to 85°C.

## symbol (each amplifier)

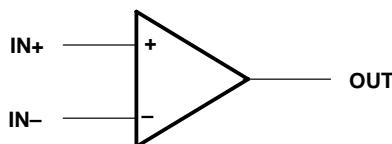


## AVAILABLE OPTIONS

T <sub>A</sub>	V <sub>IO</sub> MAX AT 25°C	PACKAGE				
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (J)	PLASTIC DIP (N)	FLAT (W)
0°C to 70°C	6 mV	RC4136D	—	—	RC4136N	—
-40°C to 85°C	6 mV	RV4136D	—	—	RV4136N	—
-55°C to 125°C	4 mV	—	RM4136FK	RM4136J	—	RM4136W

The D packages are available taped and reeled. Add the suffix R to the device type (e.g., RC4136DR).

## schematic (each amplifier)

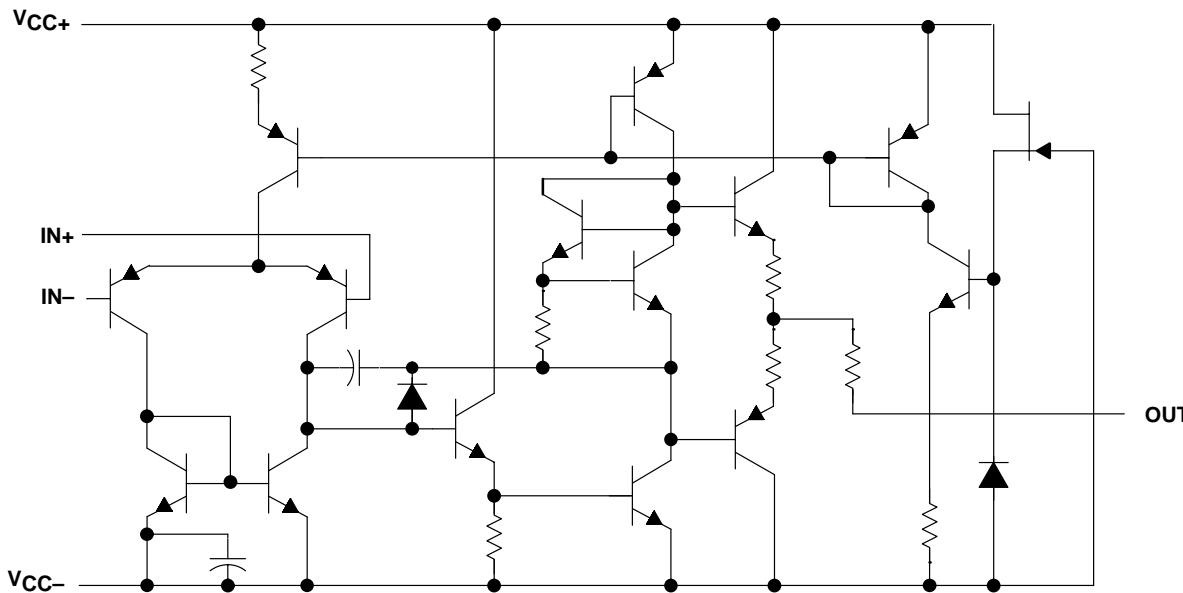absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage (see Note 1): V <sub>CC+</sub> , RC4136 and RV4136 .....	18 V
V <sub>CC+</sub> , RM4136 .....	22 V
V <sub>CC-</sub> , RC4136 and RV4136 .....	-18 V
V <sub>CC-</sub> , RM4136 .....	-22 V
Differential input voltage, V <sub>ID</sub> (see Note 2) .....	±30 V
Input voltage, V <sub>I</sub> (any input) (see Notes 1 and 3) .....	±15 V
Duration of output short circuit to ground, one amplifier at a time (see Note 4) .....	Unlimited
Continuous total dissipation .....	See Dissipation Rating Table
Package thermal impedance, θ <sub>JA</sub> (see Note 5): D package .....	86°C/W
N package .....	80°C/W
Case temperature for 60 seconds: FK package .....	260°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds: D or N package .....	260°C
Lead temperature 1.6 mm (1/16 inch) from case for 60 seconds: J or W package .....	300°C
Storage temperature range, T <sub>stg</sub> .....	-65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, unless otherwise noted, are with respect to the midpoint between V<sub>CC+</sub> and V<sub>CC-</sub>.

2. Differential voltages are at IN+ with respect to IN-.

3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 V, whichever is less.

4. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

5. The package thermal impedance is calculated in accordance with JEDEC 51-7.

DISSIPATION RATING TABLE

PACKAGE	T <sub>A</sub> ≤ 25°C POWER RATING	DERATING FACTOR	DERATE ABOVE T <sub>A</sub>	T <sub>A</sub> = 70°C POWER RATING	T <sub>A</sub> = 85°C POWER RATING	T <sub>A</sub> = 125°C POWER RATING
FK	800 mW	11.0 mW/°C	77°C	800 mW	715 mW	275 mW
J	800 mW	11.0 mW/°C	77°C	800 mW	715 mW	275 mW
W	800 mW	8.0 mW/°C	50°C	640 mW	520 mW	200 mW

RC4136, RM4136, RV4136  
QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS

The RM4136 and RV4136 are  
obsolete and are no longer supplied.

SLOS072A – MARCH 1978 – REVISED JANUARY 2002

**recommended operating conditions**

							MIN	MAX	UNIT
V <sub>CC+</sub> Supply voltage							5	15	V
V <sub>CC-</sub> Supply voltage							-5	-15	V

**electrical characteristics at specified free-air temperature, V<sub>CC+</sub> = 15 V, V<sub>CC-</sub> = -15 V**

PARAMETER	TEST CONDITIONS <sup>†</sup>	RC4136			RM4136			RV4136			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V <sub>IL</sub> Input offset voltage	V <sub>O</sub> = 0	25°C	0.5	6	0.5	4	0.5	6	0.5	6	mV
		Full range		7.5		6			7.5		
I <sub>IO</sub> Input offset current	V <sub>O</sub> = 0	25°C	5	200	5	150	5	200	5	200	nA
		Full range		300		500			500		
I <sub>IB</sub> Input bias current	V <sub>O</sub> = 0	25°C	140	500	140	400	140	500	140	500	nA
		Full range		800		1500			1500		
V <sub>i</sub> Input voltage range		25°C	±12	±14	±12	±14	±12	±14	±12	±14	V
V <sub>O</sub> M Maximum peak output voltage swing	R <sub>L</sub> = 10 kΩ	25°C	±12	±14	±12	±14	±12	±14	±12	±14	V
	R <sub>L</sub> = 2 kΩ	25°C	±10	±13	±10	±13	±10	±13	±10	±13	
	R <sub>L</sub> ≥ 2 kΩ	Full range	±10		±10		±10		±10		
A <sub>VD</sub> Large-signal differential voltage amplification	V <sub>O</sub> = ±10 V, R <sub>L</sub> ≥ 2 kΩ	25°C	20	300	50	350	20	300	20	300	V/mV
		Full range	15		25		15		15		
B <sub>1</sub> Unity-gain bandwidth		25°C		3		3.5			3		MHz
r <sub>i</sub> Input resistance		25°C	0.3*	5	0.3*	5	0.3*	5	0.3*	5	MΩ
CMRR Common-mode rejection ratio	V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω	25°C	70	90	70	90	70	90	70	90	dB
k <sub>SVS</sub> Supply-voltage sensitivity ( $\Delta V_{IO}/\Delta V_{CC}$ )	V <sub>CC</sub> = ±9 V to ±15 V, V <sub>O</sub> = 0	25°C	30	150	30	150	30	150	30	150	µV/V
V <sub>n</sub> Equivalent input noise voltage (closed loop)	A <sub>VD</sub> = 100, BW = 1 Hz, f = 1 kHz, R <sub>S</sub> = 100 Ω	25°C		8		8		8		8	nV/√Hz
I <sub>CC</sub> Supply current (all four amplifiers)	V <sub>O</sub> = 0, No load	25°C	5	11.3	5	11.3	5	11.3	5	11.3	mA
		MIN T <sub>A</sub>	6	13.7	6	13.3	6	13.7	6	13.7	
		MAX T <sub>A</sub>	4.5	10	4.5	10	4.5	10	4.5	10	
P <sub>D</sub> Total power dissipation (all four amplifiers)	V <sub>O</sub> = 0, No load	25°C	150	340	150	340	150	340	150	340	mW
		MIN T <sub>A</sub>	180	400	180	400	180	400	180	400	
		MAX T <sub>A</sub>	135	300	135	300	135	300	135	300	
Crosstalk attenuation (V <sub>O1</sub> /V <sub>O2</sub> )	A <sub>VD</sub> = 100, f = 10 kHz, R <sub>S</sub> = 1 kΩ	25°C	105		105		105		105		dB

\* This parameter is not production tested.

† All characteristics are measured under open-loop conditions with zero common-mode input voltage, unless otherwise specified. Full range is 0°C to 70°C for RC4136, -55°C to 125°C for RM4136, and -40°C to 85°C for RV4136. Minimum T<sub>A</sub> is 0°C for RC4136, -55°C for RM4136, and -40°C for RV4136. Maximum T<sub>A</sub> is 70°C for RC4136, 125°C for RM4136, and 85°C for RV4136.

**RC4136, RM4136, RV4136****QUAD GENERAL-PURPOSE OPERATIONAL AMPLIFIERS**

SLOS072A – MARCH 1978 – REVISED JANUARY 2002

The RM4136 and RV4136 are  
obsolete and are no longer supplied.

**operating characteristics,  $V_{CC+} = 15 \text{ V}$ ,  $V_{CC-} = -15 \text{ V}$ ,  $T_A = 25^\circ\text{C}$** 

PARAMETER		TEST CONDITIONS		TYP	UNIT
t <sub>r</sub>	Rise time	$V_I = 20 \text{ mV}$ ,	$C_L = 100 \text{ pF}$ ,	0.13	$\mu\text{s}$
	Overshoot factor	$V_I = 20 \text{ mV}$ ,	$C_L = 100 \text{ pF}$ ,	5	%
SR	Slew rate at unity gain	$V_I = 10 \text{ V}$ ,	$C_L = 100 \text{ pF}$ ,	1.7	$\text{V}/\mu\text{s}$