



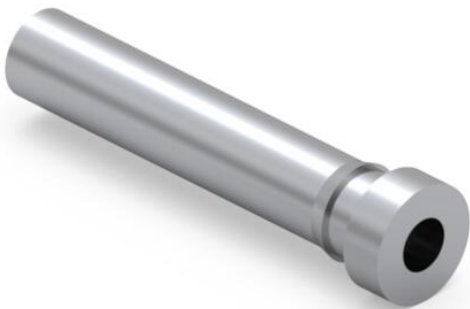

PRODUCT NUMBER: 0303-0-19-01-16-01-10-0

www.mill-max.com  
DATA SHEET

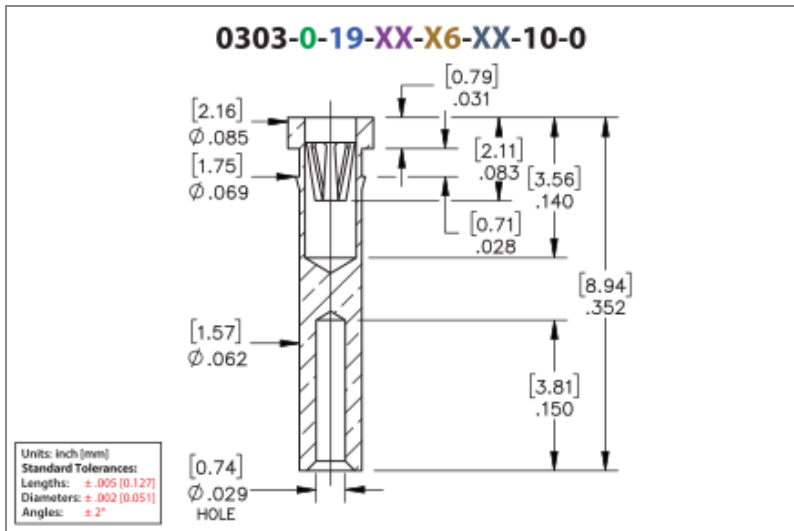


## 0303-0-19-01-16-01-10-0 SPECIFICATIONS

General Info	Materials	Technical Specs
<b>Description<sup>1</sup>:</b> Wire Termination Receptacle - Crimp Type	<b>Shell Material<sup>3</sup>:</b> Brass Alloy	<b>Durability<sup>6</sup>:</b> 1,000 Cycles Minimum
<b>Mounting Feature:</b> Press-Fit into a Non-Plated Through Hole (NPTH)	<b>Shell Plating<sup>4</sup>:</b> 200 - 300 $\mu$ " Tin/Lead over Nickel	<b>Operating Temperature Range<sup>7</sup>:</b> -55/+125° C
<b>Mounting Hole:</b> .066" (1,676mm)	<b>Contact Plating<sup>5</sup>:</b> 200 - 300 $\mu$ " Tin/Lead over Nickel	<b>Current Rating<sup>8</sup>:</b> 4.5A @ 10°C Temperature Rise
<b>Pin Diameter Range:</b> .022"-.034" (0,559-0,864mm)		<b>Contact Resistance<sup>9</sup>:</b> 10 m $\Omega$ Max
<b>Packaging:</b> Packaged in Bulk		<b>Shock<sup>10</sup>:</b> No Elect. Discontinuity > 1 $\mu$ s @ 50g
<b>RoHS:</b> No		<b>Vibration<sup>11</sup>:</b> No Elect. Discontinuity > 1 $\mu$ s @ 10-2000HZ, 20 G
<b>Product Lifecycle<sup>2</sup>:</b> Active		

NOTES:

- 1. Standard Tolerances:  
Lengths +/- .005" (0,13)  
Diameters: +/- .002" (0,051)  
Angles: +/- 2°
- 2. Part is Active and in Production, No Scheduled Obsolescence
- 3. Brass Alloy 360 per ASTM B 16, or 385 per ASTM B455
- 4. TIN/LEAD (93/7) per ASTM B 545 (Appendix X6.3.2.5 to eliminate whisker growth) Bright finish; NICKEL per ASTM B 689, Type 2 (Bright)
- 5. TIN/LEAD (93/7) per ASTM B 545 (Appendix X6.3.2.5 to eliminate whisker growth) Bright finish, NICKEL per ASTM B 689, Type 2 (Bright)
- 6. Receptacles are capable of 1,000 Minimum insertion/extraction cycles for a broad range of applications. Mating pin size, shape and finish, along with application specific variables, will affect the life of a receptacle contact.
- 7. Per IEC 60512-11-(4,-9,-10,-12)
- 8. Per IEC 60512-5-1, Current Carrying Capacity (evaluated at 10° C Temp. Rise)
- 9. Per EIA-364-23C, Low Level Contact Resistance
- 10. Per IEC 60512-6-3: Test 6c: Shock
- 11. Per IEC 60512-6-4: Test 6d: Vibration (sinusoidal)

CONTACT:

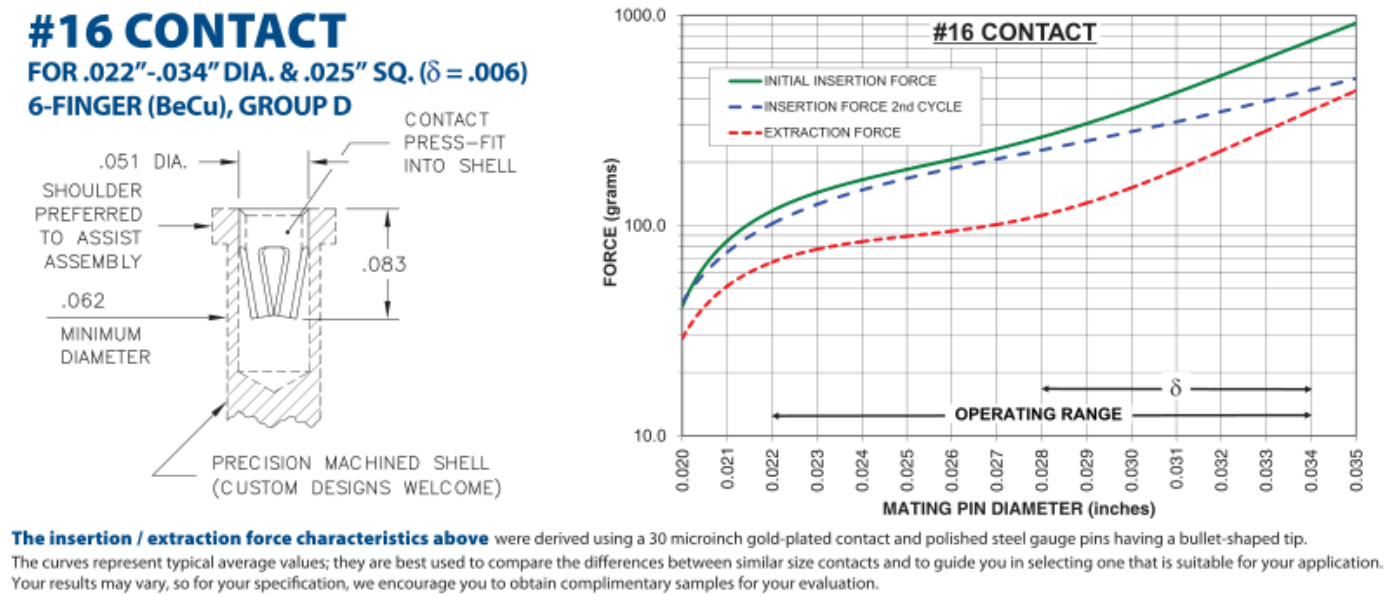

Material	Beryllium Copper	Current Rating (amps)	4.50
Fingers	6	Compliance ( $\delta$ )	0.006
Length	.080" (2,032mm)	Square Post	25.00
Contact Group	D		

## ADDITIONAL NOTES AND SPECIFICATIONS

In the interest of improved design, quality and performance , Mill-Max reserves the right to make changes in its specifications without prior notice. Specifications and tolerances are provided wherever possible. The tolerance on dimensions of critical to function features is typically held tighter than the stated standard tolerances, such as press-fits, holes and lengths affecting the coplanarity of SMT products. Due to the wide variety of interconnects Mill-Max offers, the specific tolerances vary from product to product. If you need information regarding the tolerance of a particular part, please contact Technical Services.

## RELATED LINKS AND DOCUMENTS

Engineering Notebook: ( <https://www.mill-max.com/engineering-notebooks/precision-machined-crimp-pins-and-receptacles> )

Environmental Compliance: ( <https://www.mill-max.com/rohs> )